


REV	DESCRIPTION	DATE	ECN NO.	CHANGER
A-1	Modify Drawing	11.04.11	2011088	Sally
A-2	Update the Drawing	14.02.09	ECN20140209021	Tenny

Specification

- 1.Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
- 2.Insulation Resistance:1000M Ω , Min
- 3.Contact Resistance:30m Ω , Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C
- 6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

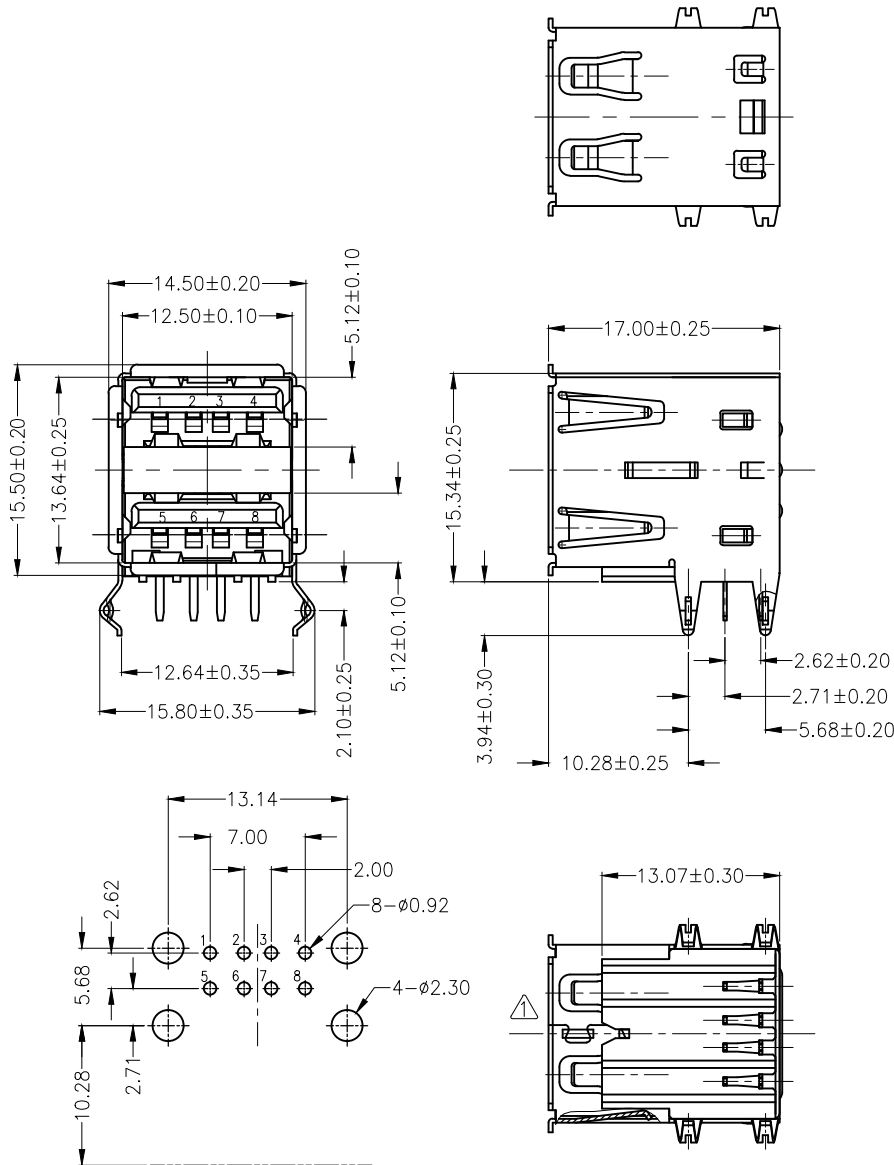

料号说明:

易飞	易拓
BUSB-A2D12F-0B8N	10304208A009
BUSB-A2D12F-0N8N	10304208A010
BUSB-A2D12F-0W8N	10304208A011
BUSB-A2D12F-0B8N-W	10304208A066
BUSB-A2D12F-0L8N	10304208A071
BUSB-A2D12F-1B8N	10304208B002
BUSB-A2D12F-1N8N	10304208B003
BUSB-A2D12F-2B8N	10304208C004
BUSB-A2D12F-2B8N-W	10304208C009
BUSB-A2D12F-3B8N	10304208D002
BUSB-A2D12F-3B8T	10304208D003
BUSB-A2D12F-3N8N	10304208D004
BUSB-A2D12F-4B8N	10304208F010
BUSB-A2D12F-4N8N	10304208F011

6	Shell in emi	C2680H	1	T=0.30 Plating nickel/Tin
5	Back Shell	SPCC	1	T=0.30 Plating nickel/Tin
4	Front Shell	C2680H	1	T=0.30 Plating nickel/Tin
3	Housing	P.B.T	1	UL94V-0 Nature/Black/White
2	Contact(Long)	C2680EH	4	T=0.25 Plating Gold
1	Contact(short)	C2680EH	4	T=0.25 Plating Gold
NO.	VARIETY	MATERIAL	QT,Y	REMARK

CZT[®] DONGGUAN ZHENGDE(YIHUA) CONNECTOR CO., LTD

X. ±0.38	X.* ±4°	UNIT:	mm	DR:		TITLE:	USB A TYPE(FEMALE) DIP 90° Double deck (W/O Shrapnel)		
.X ±0.25	.X* ±2°	3RD:		DE:					
.XX±0.20	.XX°	SCALE:	1:1	CHKD:		SHEET:	1/1	P/N:	见料号说明
.XXX±0.10	.XXX°	CUSTOMER DRAWING	REV:	A-2	APPD:	D/N:	1018-0012	M/N:	