





4

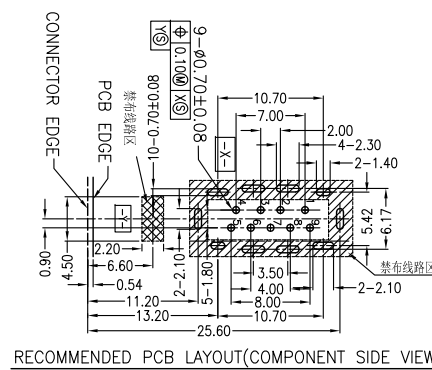

6) OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

5) CONTACT RESISTANCE: 30 mΩ MAX. INITIAL Δ 20mΩ AFTER ENVIRONMENT AND MECHANICAL TEST (AFTER 1500 CYCLES)



DETAIL "A"
SCALE 4:1

	SUS304-CSP	1	T=0.25 Plating nickel
--	------------	---	-----------------------

C

1114 0049	NEW
10310000A017	A

	1114-0549	REV
:	10312209A043	A-

4

D

D