

1

2

3

4

A

B

C








D

A

B

C

D

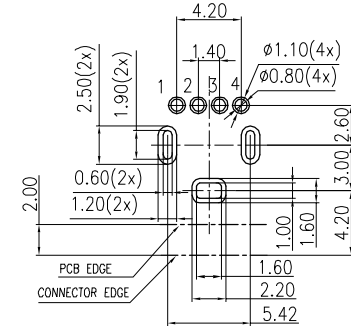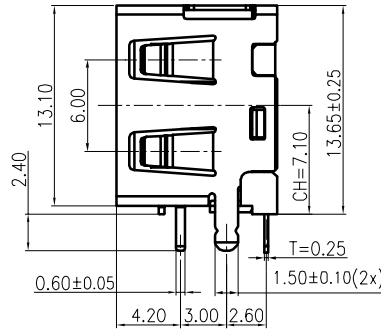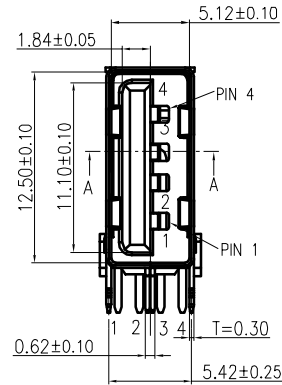



- NOTES:
- 1.MATERIAL AND PLATING :SEE TABE
 - 2.ELECTRICAL CHARACTERISTIC
 - 2.1 RATED VOLTAGE: 5VDC
 - 2.2 RATED CURRENT:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 - 2.4 INSULATION RESISTANCE: 1000MΩ Min.
 - 2.5 OPERATING TEMPERATURE: -40°C ~ 85°C
 - 2.6 SALT SPRAY TEST:24H
 - 3.MECHANICAL CHARACTERISTIC:
 - 3.1 MATING FORCE:35N MAX
 - 3.2 UNMATING FORCE:10-35N
 - 3.3 DURABILITY:1500 CYCLES

1	VBUS
2	D-
3	D+
4	GND
SHELL	SHIELD

Connector Pin Assignments

TABLE :

3	SHELL	SUS304	1	T=0.3, Plating Ni:30u"Min
2	TERMINAL	C5191	4	T=0.25,Plating Ni:50u"Min, Contact area Au:1u"Min,Solder tail matteTin:100u"Min
1	HOUSING	LCP HF	1	BLACK ,UL94V-0
NO.	VARIETY	MATERIAL	QT,Y	REMARK

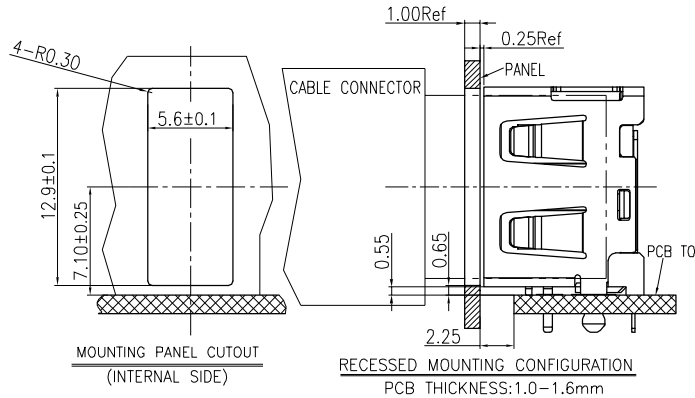

RoHS Compliant u"=μinch

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES

X. ±0.38	X.' ±4"
.X ±0.30	.X' ±2"
.XX±0.20	.XX"
XXX±0.10	.XXX"

Material:


SEE_NOTE

Designed:

YANHUA 2020.10.07

NAME:

USB 2.0 A母 SIDE DIP90度正向 客户图



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER:
HUAWE

MODEL NO:
14080579

SHEET 1 OF 1

Approved:

DWG NO:

1114-0577

REV.

PART NO:

10302204F179

A-0

1

2

3

4