



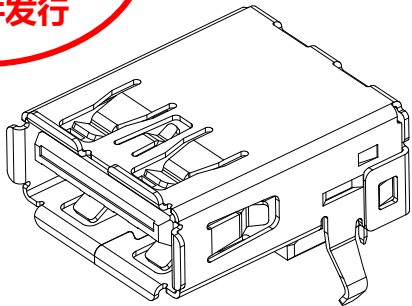

REV	DESCRIPTION	DATE	ECN NO.	CHANGER
X-0	First edition Drawing	20.11.19	_____	RX

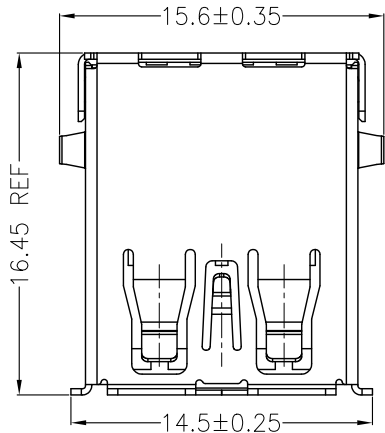

reference

Specification
1.Current Rating:1.8AMP at 250V AC
Voltage Rating:30V
2.Insulation Resistance:100MΩ Min
3.Contact Resistance:30mΩ Max
4.Dielectric Withstanding Voltage:100V AC
5.Temperature Range:-20°C to +60°C
6.Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons minimum

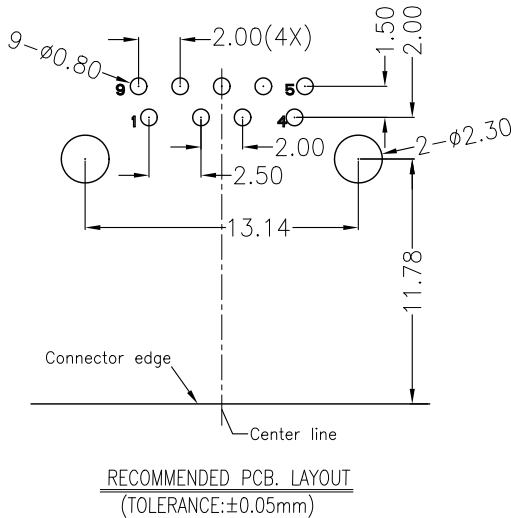
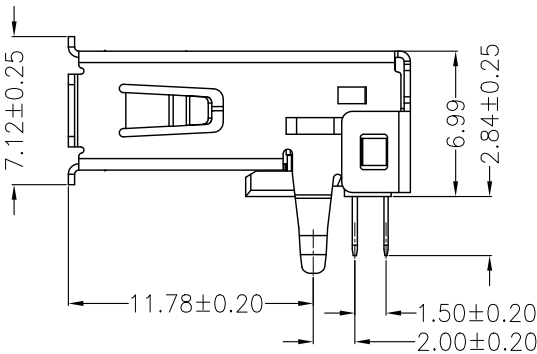
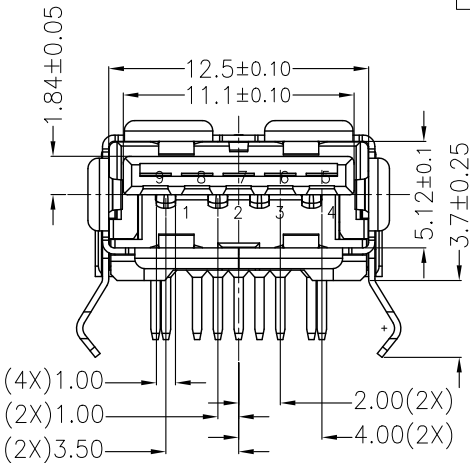


TABLE 1

5	Shell	Copper Alloy	1	T=0.30,Nickel plated.
4	5pin Molding	High temperature plastics	1	UL94V-0 ,Color: Blue
3	4pin Molding	High temperature plastics	1	UL94V-0 ,Color: Blue
2	5pin Contact	Copper Alloy	1	T=0.20,Gold 15u"/Bright tin
1	4pin Contact	Copper Alloy	1	T=0.25,Gold 15u"/Bright tin
NO.	VARIETY	MATERIAL	QT,Y	REMARK

CONNECTOR PIN SIGNAL NAME

PIN NO.	1	2	3	4	5	6	7	8	9
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSTX+

CZT[®] DONGGUAN ZHENGDE (YIHUA) CONNECTOR CO., LTD

X. ±0.38	X.* ±4°	UNIT:	mm	DR:	RX	TITLE:	USB AF DIP 90°		
.X ±0.25	.X* ±2°	3RD:		DE:	RX	SHEET:	1/1	P/N:	10312209D036
.XX±0.20	.XX*	SCALE:	1:1	CHKD:	WangPen	D/N:	1119-0665	M/N:	_____
.XXX±0.10	.XXX*	REV:	X-0	APPD:	THJ				