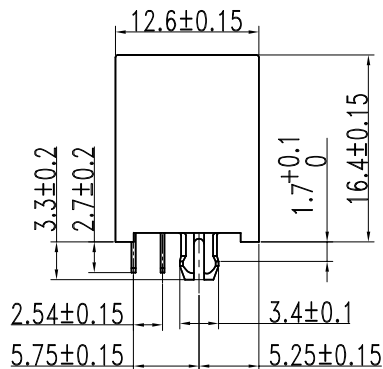
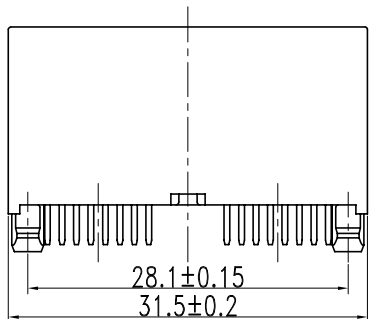
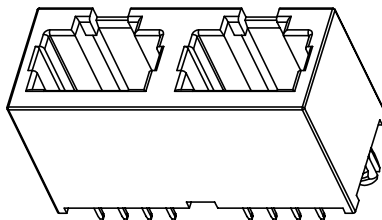
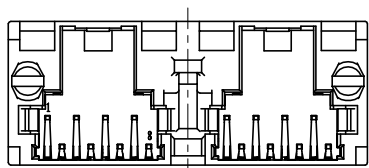


电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN.@500 VDC
5. 耐压强度: 端子之间: 1000V DC OR AC 峰值

技术要求

1. 塑胶材质: PBT 114C黄;
2. 扁针材质: 磷青铜, T=0.35mm;
3. 扁针电镀: 接触区镀金可选, 镍底50u", 剥头电镀雾锡100u";
4. 插入/拔出力: 20N Max.
5. 配合强度: 50N for 60s ±5s.
6. 可靠性: 750次插拔.

环境特性:

1. 储存温度: -40°C~+85°C 相对湿度<80%.
2. 工作温度: -40°C~+85°C
3. 储存时间: 12个月.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PBT .
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. CONTACT PLATING : 1: CONTACT AREA-SELECTIVE GOLD PLATING OPTION.
2: TAILS PLATING TIN 100u" OVER NICKEL 50u".
4. MATING/UNMATING FORCE: : 20N Max..
5. RETENTION STRENGTH : 50N for 60s ±5s.
6. DURABILITY : 750 CYCLES.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000V DC OR AC PEAK;ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER @0.5mA 50Hz or 60Hz a minute.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
2. OPERATION TEMPERATURE : -40°C~+85°C
3. GUARANTEE PERIOD: 12 MONTHS.

MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096

RoHS Compliant u"=μinch

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

SCALE 1:1 UNIT mm CUSTOMER: MODEL NO: 第一视角 A4 SIZE

TOLERANCES 公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material: 见技术要求
Finish: 电 镀
SHEET 1 OF 1
第 页 共 页

P/N	DESCRIPTION	LOGO	MATERIAL COLOR
10202788A123	5224-LED双胞插座 8P8C G/F 装配式无灯高度16.4无CZT	CZT	普通PBT黄114C(环保料)
Designed: 设计	陈智艳	NAME: 名称	RJ45 1X2 5224-LED W/O LED
Checked: 审核		DWG NO: 图 号	E52190602
Approved: 核准		PART NO: 料 号	见表格
			REV. 版本 01