
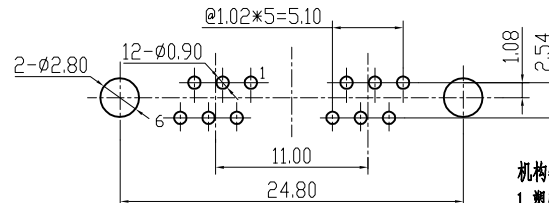


REV. 版本	ECN NO. 变更说明	DATE 日期
01	ADD P/N	2008.07.28
02	ADD P/N	2008.08.12
03-09	ADD P/N	2013.03.11
07	更新图面/180度专用	2010.12.13

A

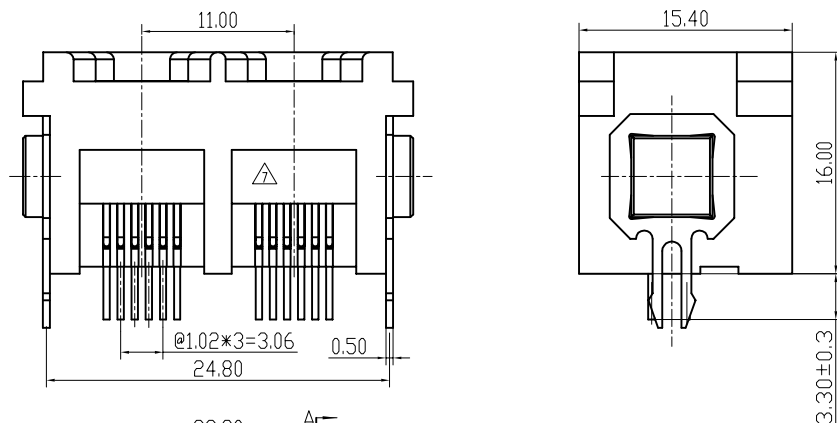

环境特性:

1. 储存温度: -40°C~+85°C 相对湿度<80%.
2. 工作温度: -40°C~+85°C


机构特性:

1. 塑壳材质: PBT, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镀底, 表面全部镀金;
4. 铁脚: 黄铜, 厚度=0.5mm, 镀镍.
5. 插入/拔出力: 30N Max.
6. 配合强度: 50N for 60s±5s.
7. 使用寿命: 最少750次插拔.

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 一分钟.

B

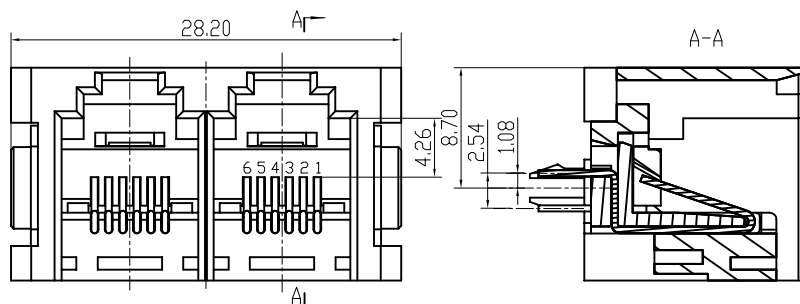

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz OR 60Hz a minute.

MECHANICAL:

1. HOUSING&INSERT MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MENTAL PBG : BRASS T=0.5mm PLATED NICKEL.
5. MATING/UNMATING FORCE: : 30N Max..
6. RETENTION STRENGTH : 50N for 60s±5s.
7. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
2. OPERATION TEMPERATURE : -40°C~+85°C

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

C

	NEW P/N 料号	P/N 料号	DESCRIPTION 描述	MATERIAL COLOR 材质
1	10205464B005	B525N2-6403-M029	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C 3U (180度带铁脚)	PBT BLACK 黑
		B525N2-64GP-M019	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C G/F (180度带铁脚)	PBT BLACK 黑
	10205466A006	B525N2-66GP-M028	RJ11 1X2 5225 6P6C(123456) 180° WITH MENTAL PBG//5225双芯 6P6C G/F (180度带铁脚)	PBT GRAY 灰
2		B525N2-6403-M031	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C 3U (180度带铁脚)	PBT GRAY 灰
		B525N2-6615-M023	RJ11 1X2 5225 6P6C(123456) 180° WITH MENTAL PBG//5225双芯 6P6C 15U (180度带铁脚)	PBT GRAY 灰
		B525N2-6430-M029	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C 30U (180度带铁脚)	PBT BLACK 黑
		B525N2-64GP-M031	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C G/F (180度带铁脚)	PBT GRAY 灰
	10205466D003	B525N2-6615-M026	RJ11 1X2 5225 6P6C(123456) 180° WITH MENTAL PBG//5225双芯 6P6C 15U (180度带铁脚)	PBT BLACK 黑
3	10205464A003	B525N2-64GP-M029	RJ11 1X2 5225 6P4C(2345) 180° WITH MENTAL PBG//5225双芯 6P4C G/F (180度带铁脚)	PBT BLACK 黑
4	10205462A004	B525N2-62GP-M017	RJ11 1X2 5225 6P2C(34) 180° WITH MENTAL PBG//5225双芯 6P2C G/F (180度带铁脚)	PBT GRAY 灰
	10205462A010	B525N2-62GP-M015	RJ11 1X2 5225 6P2C(34) 180° WITH MENTAL PBG//5225双芯 6P2C G/F (180度带铁脚)	PBT BLACK 黑
		B525N2-6203-M015	RJ11 1X2 5225 6P2C(34) 180° WITH MENTAL PBG//5225双芯 6P2C 3U (180度带铁脚)	PBT BLACK 黑
8	10205466A003	B525N2-66GP-M026	RJ11 1X2 5225 6P6C 180° WITH MENTAL PBG//5225双芯 6P6C G/F (180度带铁脚)	PBT BLACK 黑
	10205462C005	B525N2-6206-M017	RJ11 1X2 5225 6P2C 180° WITH MENTAL PBG//5225双芯 6P2C 6U (180度带铁脚)	PBT GRAY 灰
		B525N2-6415-M021	RJ11 1X2 5225 6P4C 180° WITH MENTAL PBG//5225双芯 6P4C 15U (180度带铁脚)	PBT GRAY 灰
9		B525N2-6215-M017	RJ11 1X2 5225 6P2C 180° WITH MENTAL PBG//5225双芯 6P2C 15U (180度带铁脚)	PBT GRAY 灰
	10205466C007		RJ11 1X2 5225 6P6C 180° WITH MENTAL PBG//5225双芯 6P6C 6U (180度带铁脚)	PBT WHITE 白
	10205462A010	B525N2-62GP-M015	RJ11 1X2 5225 6P2C 180° WITH MENTAL PBG//5225双芯 6P2C G/F (180度带铁脚)	PBT BLACK 黑

D

RoHS Compliant

5225 双胞胎 6P 180度带铁脚插座

CZT ® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差 00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25 ANGLES ±1°	Material: 材质 SEE_NOTE	Designed: 设计 陈智艳	NAME: 名称 RJ11 1X2 5225 6P 180° WITH MENTAL PBG
Finish: 电镀 SEE_NOTE					Checked: 审核		DWG NO: 图号 E52QWY-1001-22
SHEET 1 OF 1 第1页 共1页					Approved: 核准		PART NO: 料号 SEE_NOTE
SCALE 比例 1:1				UNIT 单位 mm	CUSTOMER: 客户 MODEL NO: 料号		REV. 版本 09