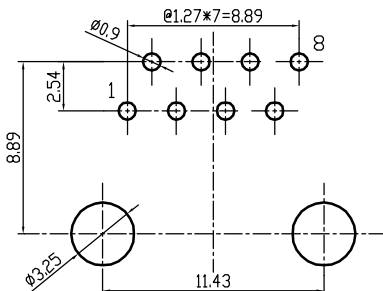
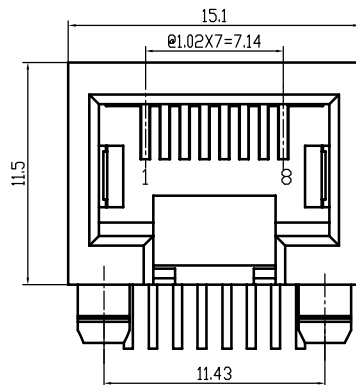


A

B

C

D

PC BOARD LAYOUT
THICKNESS=1.6mm

NOTES:


ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMPS@25° C
- CONTACT RESISTANCE : 20 mΩ MAX.
- INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

- HOUSING&INSERT& MATERIAL : PBT/PA66 UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE φ0.46mm.
- CONTACT PLATING : GOLD PLATING OVER NICKEL.
- SHIELD : BRASS T=0.2mm PLATED NICKEL.
- MATING/UNMATING FORCE: : 30N Max.
- RETENTION STRENGTH : 50N for 60s±5s.
- DURABILITY : 750 CYCLES MIN.

RoHS Compliant

CZT® 温州意华连接器股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTDA4
SIZESCALE
比例UNIT
单位CUSTOMER:
客户MODEL NO:
料号TOLERANCES
公差00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25

ANGLES ±1°

Material:
材质

SEE NOTE

Finish:
电镀

SEE NOTE

SHEET

1 OF 1

第1页 共1页

Designed:
设计

杨光权

Checked:
审核Approved:
核准NAME:
名称

5321 插座 8P圆针二件式

DWG NO:
图号


B5300006

PART NO:
料号

SEE NOTE

REV.
版本

07

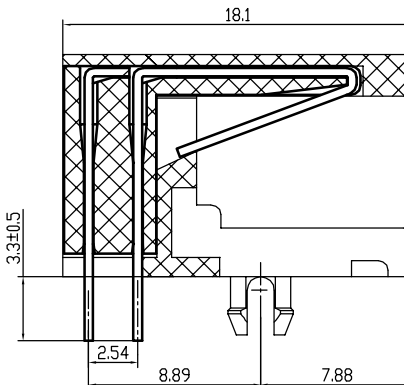


电气特性:

- 额定电压: 125 VAC RMS
- 额定电流: 1.5 AMPS@25° C
- 接触电阻: 20mΩ MAX.
- 绝缘电阻: 1000 MΩ MIN. @500 VDC
- 耐压强度: 1000 VAC RMS, contact to contact 或 1500VDC, contact to screen and test panel @0.5mA 50Hz 或 60Hz 1 分钟.

环境特性:

- 储存温度: -40° C~+85° C 相对湿度<80%.
- 工作温度: -40° C~+85° C

△备注: 原B531N-8806-M011此易飞相对应的材质
PBT红485U更改为PBT红485C

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40° C~+85° C RELATIVE HUMIDITY<80%
 - OPERATION TEMPERATURE : -40° C~+85° C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
ROHS PART NUMBER:

易拓料号	易飞料号	DESCRIPTION 描述	MATERIAL 材质
10215388C013	B531N-8806-M009	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 6u" 二件式(圆针)管子包装	PBT BLACK黑
	B531N-8806-M010	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 6u" 二件式(圆针)	PBT BLACK黑
10215388B002	B531N-8803-M014	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 3u" 二件式(圆针)管子包装	PBT BLACK黑
	B531N-8806-M010	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 6u" 二件式(圆针)	PBT YELLOW黄
	B531N-8806-M011	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 6u" 二件式(圆针)	PBT RED 485C
	B531N-8806-M012	RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 6u" 二件式(圆针)	PBT YELLOW 黄DOC4201005
	B531N-8203-M001	RJ45 1X1 5321 8P2C TWO P1BCE SUIT ROUND PIN/5321插座 8P2C 3u" 二件式(圆针)	PBT GRAY 灰
10215388A017		RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 1.5u" 二件式(圆针)管子包装	PBT GRAY 冷灰3u
10215388B016		RJ45 1X1 5321 8P8C TWO P1BCE SUIT ROUND PIN/5321插座 8P8C 3u" 二件式(圆针)管子包装	PBT GRAY 冷灰3u

A

B

C

D