


REV. 版本	ECN NO. 变更说明	DATE 日期
01-06	ADD P/N	09/08/20
07	ADD P/N	09/11/06
08	ADD P/N	10/01/08



电气特性:



1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 35 mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS 60Hz, 1分钟

机构特性:



1. 塑壳材质 : PBT, UL94V-0; 黑
2. 圆针材质 : 磷青铜, Ø0.46mm;
3. 圆针电镀 : 镍底, 表面全部镀金;
4. 插入/拔出力 : 22N / 2.27kg Max.
5. 配合强度 : 57.83N Min.
6. 可靠性 : 最少750次插拔.

环境特性:

1. 储存温度: -10° ~ +40°
2. 工作温度: -40° ~ +85° / -20° C ~ +70° C (ABS)

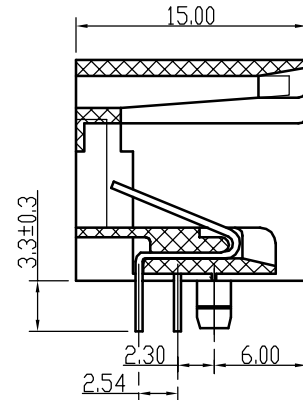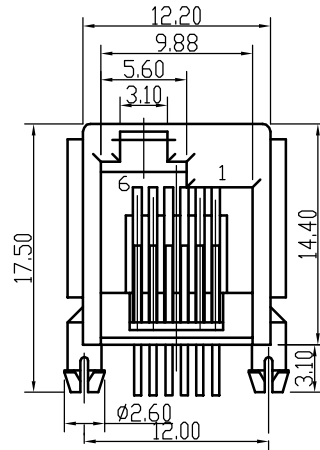

耳朵可选:
有耳/切耳
EAR OPTION
WITH EAR/CUT EAR

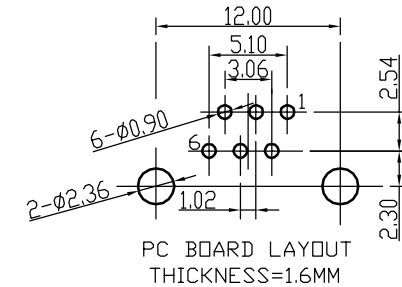

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT/PA66/ABS UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE : 22N / 2.27kg Max.
5. RETENTION STRENGTH : 57.83N Min.
6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -10°C TO +40°C RELATIVE HUMIDITY < 80%
2. OPERATION : -40°C TO +85°C / -20° C ~ +70° C (ABS)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

ROHS PART NUMBER	DESCRIPTION	CONTACT PLATING GOLD	LOGO	MATERIAL COLOR
△ HB553N-66GF-M015	RJ11 5523 6P6C LEFT POSITION (WITH EAR) JACK 有耳	G/F	NO LOGO	PBT DARK GRAY 深灰
△ HB553N-6603-M001	RJ11 5523 6P6C LEFT POSITION (WITH EAR) JACK 有耳	3u"	NO LOGO	PBT DARK GRAY 深灰
△ HB553N-6203-H001	RJ11 5523 6P2C(1.6) LEFT POSITION (WITH EAR) JACK 有耳	3u"	NO LOGO	ABS BLACK 黑
HB553N-6206-M017	RJ11 5523 6P2C(1.6) LEFT POSITION (CUT EAR) JACK 切耳	6u"	NO LOGO	PBT BLACK 黑
△ HB553N-6206-M001	RJ11 5523 6P2C(1.6) LEFT POSITION WITH EAR JACK 有耳	6u"	NO LOGO	PBT BLACK 黑
△ HB553N-66GF-M017	RJ11 5523 6P6C LEFT POSITION (CUT EAR) JACK 切耳	G/F	NO LOGO	PBT BLACK 黑
△ HB553N-6603-M002	RJ11 5523 6P6C LEFT POSITION (WITH EAR) JACK 有耳	3u"	NO LOGO	PBT LIGHT GRAY 浅灰
△ HB553N-6606-M002	RJ11 5523 6P6C LEFT POSITION (WITH EAR) JACK 有耳	6u"	NO LOGO	PBT WHITE 白
△ HB553N-6606-M003	RJ11 5523 6P6C LEFT POSITION (WITH EAR) JACK 有耳	6u"	NO LOGO	PBT BLACK 黑

RoHS Compliant

5523左扣位 6P 插座

CZT® 温州竟华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD		TOLERANCES 公差 .0 ± 0.25 .00 ± 0.20 .000 ± 0.10	Material: 材质 SEE NOTE	Designed: 设计 杨光权	NAME: 名称 RJ11 5523 6P LEFT POSITION JACK
第一视角	A4 SIZE	SCALE 比例 1:1	UNIT 单位 mm	CUSTOMER: 客户 N/A	Model NO: 料号 N/A
SHEET 1 OF 1 第 1 页 共 1 页		Checked: 审核		Approved: 核准	REV. 版本 08
PART NO: 料号 SEE NOTE		DWG NO: 图号 E55QWY-1238-1		PART NO: 料号 SEE NOTE	