


A


B

C


D




@1.27X9=11.43



商标有无可互换

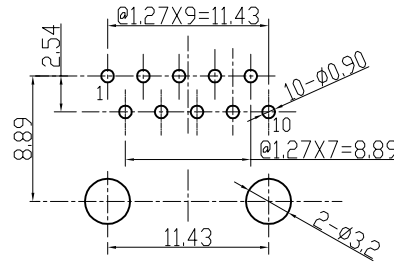

PC BOARD LAYOUT
THICKNESS=1.6MM

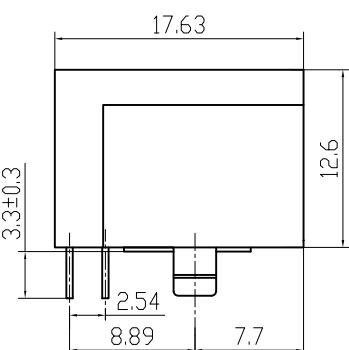

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMPS@25° C
- CONTACT RESISTANCE : 20 mΩ MAX
- INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz or 60Hz a minnte.

ELECTRICAL:

- HOUSING&INSERT MATERIAL : PBT/PA66 UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- CONTACT PLATING : GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE: : 30N Max..
- RETENTION STRENGTH : 50N for 60s±5s.
- DURABILITY : 750 CYCLES MIN.

5621S不包铁 10P 插座

RoHS Compliant

CZT® 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

TOLERANCES
公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material:
材质

SEE_NOTE

Designed:
设计

陈智艳

NAME:
名称

RJ45 5621S NO SHIELD 10P JACK

Finish:
电镀

SEE_NOTE

Checked:
审核

DWG NO:
图号

E5600026

REV.
版本

17

SHEET 1 OF 4
第 1 页 共 4 页

Approved:
核准

PART NO:
料号

SEE_NOTE

机构特性:

- 塑壳材质: PBT/PA66,UL94V-0;
- 圆针材质: 磷青铜, Ø0.46mm;
- 圆针电镀: 镍底, 表面全部镀金;
- 插入/拔出力: 30N Max.
- 配合强度: 50N for 60s±5s.
- 使用寿命: 最少750次插拔.

备注:

03版说明:修改外形尺寸与实物相符详见
《品质异常单》KF20101123-01

环境特性:

- 储存温度: -40°C~+85°C相对湿度<80%.
- 工作温度: 40°C~+85°C
- 储存时间: 12个月

电气特性:

- 额定电压: 150 VAC RMS
- 额定电流: 1.5 AMPS@25° C
- 接触电阻: 20mΩ MAX.
- 绝缘电阻: 1000 MΩ MIN.@500 VDC
- 耐压强度: : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 一分钟.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 - OPERATION TEMPERATURE : -40°C~+85°C
 - GUARANTEE PERIOD : 12 MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

REV. 版本	ECN NO. 变更说明	DATE 日期
01-06	ADD P/N	2011.08.23
03	见备注	2010.11.23
07-11	增加第二页	2012.11.19
08-10	增加料号	2012.09.01
09	更新料号规格	2011.12.09
12	见第三页	2013.03.11
13-16	见料号表	2014.08.18
17	增加料号	2014.11.24

A

B

C

D

A

B

C

D



NEW P/N		P/N	DESCRIPTION	LOGO	材质颜色
	10220118B009	B561N-1830-M004	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 30U (封闭式)	NO LOGO	PBT YELLOW 黄
		B561N-1830-M006	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 30U (封闭式)	NO LOGO	PBT BLACK 黑
	10220118B022	B561N-18GF-M006	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C G/F (封闭式)	NO LOGO	PBT BLACK 黑
		B561N-1803-M015	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 3u" (封闭式)	NO LOGO	PBT hoary 灰白D9032
	10220118D005	B561N-1815-U002	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 15u" (封闭式)	NO LOGO	PA66 BLACK 黑
		B561N-18GF-M017	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C G/F CZT (封闭式)	CZT LOGO	PBT BLACK 黑
	10220118G001	B561N-1850-U002	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 50U (封闭式)	NO LOGO	PA66 BLACK 黑
		B561N-1103-M003	RJ45 5621S NO SHIELD 10P10C/5621插座 10P10C 3U (封闭式)	NO LOGO	PBT BLACK 黑无卤
	10220118C009	B561N-1806-M015	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 6U (封闭式)	NO LOGO	PBT YELLOW 黄
		B561N-1806-M016	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 6U CZT (封闭式)	CZT LOGO	PBT BLACK 黑
	10220118A021	B561N-18GF-M018	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C G/F (封闭式)	NO LOGO	透明PBT YELLOW黄/插芯PBT BLACK黑
		B561N-18GF-U002	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C G/F (封闭式)	NO LOGO	PA66 BLACK 黑
	10220118A012	B561N-14GF-M007	RJ45 5621S NO SHIELD 10P4C(2.3.4.7)/5621插座 10P4C G/F (封闭式)	NO LOGO	PBT BLACK 黑
		B561N-1815-U004	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 15u" (封闭式)	NO LOGO	PA66 GRAY灰
	10220111C004	B561N-11GF-M003	RJ45 5621S NO SHIELD 10P10C/5621插座 10P10C G/F (封闭式)	NO LOGO	PBT BLACK 黑
			RJ45 5621S NO SHIELD 10P10C/5621插座 10P10C 6u" (封闭式)	NO LOGO	PBT BLACK 黑
	10220118B011	B561N-1803-M006	RJ45 5621S NO SHIELD 10P8C/5621插座 10P8C 3u" (封闭式)	NO LOGO	PBT BLACK 黑
		B561N-1815-M006	RJ45 5621S NO SHIELD 10P8C/5621插座 10P8C 15u" (封闭式)	NO LOGO	PBT BLACK 黑
	10220111C009		RJ45 5621S NO SHIELD 10P10C/5621插座 10P10C 6u" (封闭式)	NO LOGO	PA66 BLACK 黑
			RJ45 5621S NO SHIELD 10P8C/5621插座 10P8C 钎金15u" (封闭式)	NO LOGO	PBT BLACK 黑
	10220118D009		RJ45 5621S NO SHIELD 10P8C/5621插座 10P8C 1.5u" (封闭式)	NO LOGO	PBT BLACK 黑
			RJ45 5621S NO SHIELD 10P10C/5621插座 10P10C 6u" (封闭式)	NO LOGO	PA46 BLACK 黑

REV. 版本	ECN NO. 变更说明	DATE 日期
01-06	ADD P/N	2011.08.23
03	见备注	2010.11.23
07-11	增加第二页	2012.11.19
08-10	增加料号	2012.09.01
09	更新料号规格	2011.12.09
12	见第三页	2013.03.11
13-17	增加易拓料号	2014.11.24

A

B

C

D

RoHS Compliant

5621S不包铁 10P 插座

CZT ® 温州意华接插件股份有限公司 WENZHOUIHUA CONNECTOR CO., LTD				TOLERANCES 公差 00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25 ANGLES ±1°	Material: 材质 SEE_NOTE	Designed: 设计 陈智艳	NAME: 名称 RJ45 5621S NO SHIELD 10P JACK
					Finish: 电镀 SEE_NOTE	Checked: 审核	DWG NO: 图号 E5600026
					SHEET 2 OF 4 第 2 页 共 4 页	Approved: 核准	PART NO: 料号 SEE_NOTE
							REV. 版本 17



A4
SIZE

SCALE
比例
1:1

UNIT
单位
mm

CUSTOMER:
客户
MODEL NO:
料号

1

2

3

4

A

B

C


D

1


2

3


4





@1.27X9=11.43



商标有无可互换

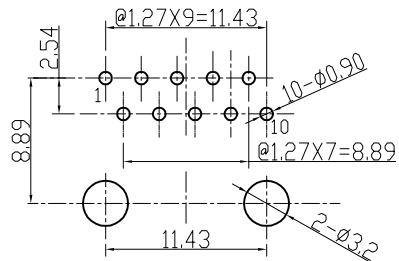

PC BOARD LAYOUT
THICKNESS=1.6MM

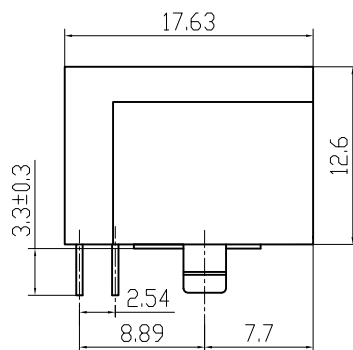


刻生产日期

机构特性:

1. 塑壳材质: PBT/PA66, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 插入/拔出力: 30N Max.
5. 配合强度: 50N for 60s ± 5s.
6. 使用寿命: 最少750次插拔.

环境特性:

1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: 40°C~+85°C
3. 储存时间: 12个月



RECOMMENDED PANEL CUTOUT AND JACK LOCATION

备注:

03版说明:修改外形尺寸与实物相符详见
《品质异常单》KF20101123-01

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact
@0.5mA 50HZ 或 60HZ 1 分钟.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact
@0.5mA 50HZ or 60HZ 1 min.

ELECTRICAL:

1. HOUSING&INSERT& MATERIAL : PBT/PA66 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. MATING/UNMATING FORCE: : 30N Max..
5. RETENTION STRENGTH : 50N for 60s ± 5s.
6. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

材质颜色

TOP TIP	P/N	DESCRIPTION	LOGO	MATERIAL COLOR
10220118B012	B561N-1803-M019	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 3U刻生产日期(封闭式)	CZT LOGO	PBT BLACK黑
10220118B019	B561N-1803-M020	RJ45 5621S NO SHIELD 10P8C(2.3.4...9)/5621插座 10P8C 3U刻生产日期(封闭式)	CZT LOGO	PBT YELLOW黄114C

RoHS Compliant

5621S不包铁 10P 插座

CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差 00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25 ANGLES ±1°	Material: 材质 SEE_NOTE	Designed: 设计 陈智艳	NAME: 名称 RJ45 5621S NO SHIELD 10P JACK
Finish: 电镀 SEE_NOTE					Checked: 审核		DWG NO: 图号 E5600026
SHEET 3 OF 4 第 3 页 共 4 页					Approved: 核准		PART NO: 料号 SEE_NOTE
SCALE 比例 1:1				UNIT 单位 mm	CUSTOMER: 客户 MODEL NO: 料号		REV. 版本 17

A

B

C

D

1

2

3





4

A

B

C

D

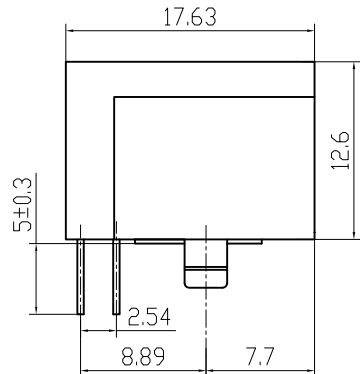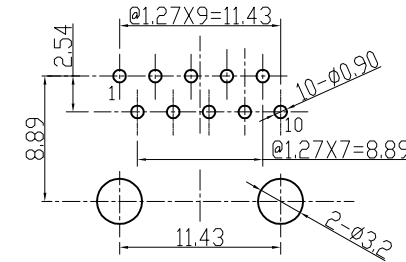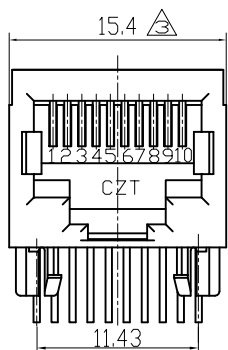

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMPS@25° C
- CONTACT RESISTANCE : 20 mΩ MAX
- INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- WITHSTAND VOLTAGE : 1000 VAC RMS,contact to contact @0.5mA 50Hz or 60Hz 1 min.

ELECTRICAL:

- HOUSING&INSERT& MATERIAL : PBT/PA66 UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- CONTACT PLATING : GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE: : 30N Max..
- RETENTION STRENGTH : 50N for 60s±5s.
- DURABILITY : 750 CYCLES MIN.

5621S不包铁 10P 插座

RoHS Compliant

CZT 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO.,LTD

SCALE 1:1 UNIT mm CUSTOMER: MODEL NO:

第一视角 SIZE

TOLERANCES 公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material: 材质	SEE_NOTE
Finish: 电镀	SEE_NOTE
SHEET 4 OF 4 第 4 页 共 4 页	

Designed: 设计	陈智艳
Checked: 审核	
Approved: 核准	

NAME: 名称	RJ45 5621S NO SHIELD 10P JACK
DWG NO: 图号	E5600026
PART NO: 料号	SEE_NOTE
REV. 版本	17

机构特性:

- 塑壳材质: PBT/PA66,UL94V-0;
- 圆针材质: 磷青铜, Ø0.46mm;
- 圆针电镀: 镍底, 表面全部镀金;
- 插入/拔出力: 30N Max.
- 配合强度: 50N for 60s±5s.
- 使用寿命: 最少750次插拔.

电气特性:

- 额定电压: 125 VAC RMS
- 额定电流: 1.5 AMPS@25° C
- 接触电阻: 20mΩ MAX.
- 绝缘电阻: 1000 MΩ MIN.@500 VDC
- 耐压强度: 1000 VAC RMS,contact to contact @0.5mA 50Hz 或 60Hz 1 分钟.

备注:

03版说明:修改外形尺寸与实物相符详见《品质异常单》KF20101123-01

环境特性:

- 储存温度: -40°C~+85°C相对湿度<80%.
- 工作温度: 40°C~+85°C
- 储存时间: 12个月

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 - OPERATION TEMPERATURE : -40°C~+85°C
 - GUARANTEE PERIOD : 12 MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

TOP TIP	P/N	DESCRIPTION	LOGO	MATERIAL COLOR
10220118G003	B561N-1850-Y001	RJ45 5621S NO SHIELD 10P10C/5621 10P8C 50U 剥头5.0(封闭式)	NO LOGO	PPS1140A6 BLACK 黑

材质颜色

1

2

3

4