


A

B

C

D

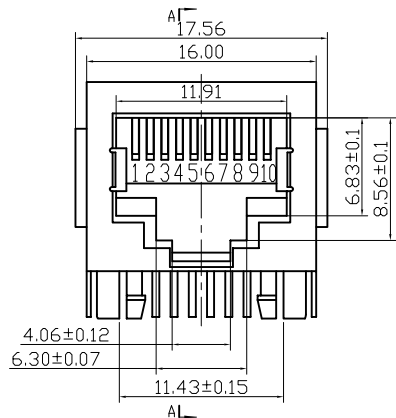

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS, contact to contact @0.5mA 50Hz 或 60Hz 1 分钟.


NOTES:

ELECTRICAL:


1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING&INSERT& MATERIAL : PBT/PA66 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. SHIELD : BRASS T=0.2mm PLATED NICKEL.
5. MATING/UNMATING FORCE: : 30N Max..
6. RETENTION STRENGTH : 50N for 60s±5s.
7. DURABILITY : 750 CYCLES MIN.

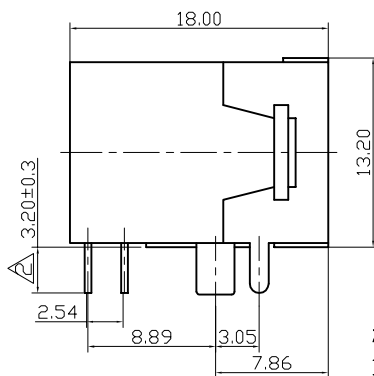

A-A



机构特性:

1. 塑壳材质: PBT/PA66, UL94V-0;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 屏蔽壳材质: 黄铜 T=0.2 镀镍
5. 插入/拔出力: 30N Max.
6. 配合强度: 50N for 60s±5s.
7. 使用寿命: 最少750次插拔.

环境特性:


1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C
3. 储存时间: 12个月

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
2. OPERATION TEMPERATURE : -40°C~+85°C
3. GUARANTEE PERIOD : 12 MONTHS

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

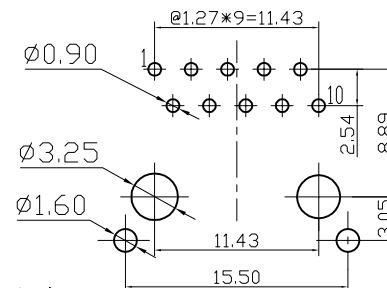PC BOARD LAYOUT
THICKNESS=1.60MM

NEW P/N	P/N	DESCRIPTION	CONTACT PLATING GOLD	LOGO	MATERIAL COLOR
10220118C011	B561H-1806-M003	RJ45 1*1 5621-S-H 10P8C(2.3...9) JACK	6u"	NO LOGO	PBT BLACK 黑点
△	B561H-1106-M001	RJ45 1*1 5621-S-H 10P10C(1.2.3...10)JACK	6u"	NO LOGO	PBT BLACK 黑点
	B561H-1106-U001	RJ45 1*1 5621-S-H 10P10C(1.2.3...10)JACK	6u"	NO LOGO	PA66 BLACK 黑点
	B561H-1106-M001	RJ45 1*1 5621-S-H 10P10C(1.2.3...10)JACK	6u"	NO LOGO	PBT BLACK 黑点
	B561H-1106-M001	RJ45 1*1 5621-S-H 10P10C(1.2.3...10)JACK	6u"	NO LOGO	PBT BLACK 黑点
10220118A023	B561H-18GF-M002	RJ45 1*1 5621-S-H 10P8C(2.3...9) JACK	G/F	NO LOGO	PBT BLACK 黑点
△	B561H-1806-U001	RJ45 1*1 5621-S-H 10P8C(2.3...9) JACK	6u"	NO LOGO	PA66 BLACK 黑点
	10220118B015	RJ45 1*1 5621-S-H 10P8C(2.3...9) JACK	3u"	NO LOGO	PBT BLACK 黑点
	B561H-1103-M001	RJ45 1*1 5621-S-H 10P10C(1.2.3...10)JACK	3u"	NO LOGO	PBT BLACK 黑点
	10220114A007	RJ45 1*1 5621-S-H 10P4C(1.2.3.6)JACK	1.5u"	NO LOGO	PA66 BLACK 黑点
10220111A005	B561H-11GF-M001	RJ45 1*1 5621-S-H 10P10C JACK	G/F	NO LOGO	PBT BLACK 黑点

RoHS Compliant

5621-S-H 10P 半包插座

CZT ® 温州意华连接器股份有限公司 WENZHOUIYHUA CONNECTOR CO.,LTD				TOLERANCES 公差 00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25 ANGLES ±1°	Material: 材质 SEE_NOTE	Designed: 设计	NAME: 名称 RJ45 5621-S-H 10P JACK
第一视角 A4 SIZE				Finish: 电镀 SEE_NOTE	Checked: 审核	Approved: 核准	DWG NO: 图号 E56C07121404
SCALE 比例 1:1				UNIT 单位 mm	CUSTOMER: 客户 MODEL NO: 料号	SHEET 第 2 页 共 2 页	PART NO: 料号 SEE_NOTE
							REV. 版本 03

A

B

C

D