


电气特性：

- 1. 额定电压：150 VAC RMS
- 2. 额定电流：1.5 AMPS@25° C
- 3. 接触电阻：20mΩ MAX.
- 4. 绝缘电阻：1000 MΩ MIN. @500 VDC
- 5. 耐压强度：1000 VAC RMS, contact to contact
@0.5mA 50Hz 或 60Hz 1 分钟.

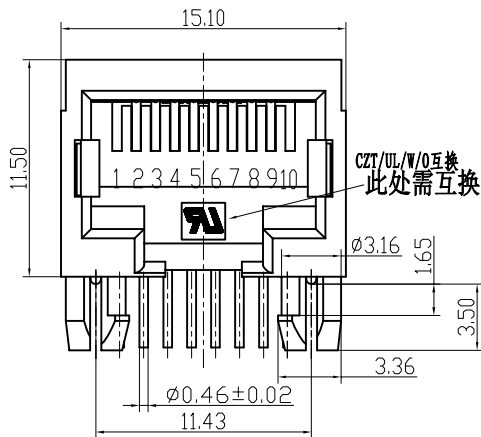

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 150 VAC RMS.
- 2. CURRENT RATING : 1.5 AMPS@25° C
- 3. CONTACT RESISTANCE : 20 mΩ MAX
- 4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
- 5. WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
: CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
@0.5mA 50Hz 或 60Hz 1 min.

MECHANICAL:

- 1. HOUSING/INSERT MATERIAL : PBT/PA66 UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- 3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
- 4. MATING/UNMATING FORCE: : 30N Max..
- 5. RETENTION STRENGTH : 50N for 60s±5s.
- 6. DURABILITY : 750 CYCLES MIN.

RoHS Compliant

CZT 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户
		1:1	mm	MODEL NO: 料号



TOLERANCES 公差
00~15 ± 0.15
15~30 ± 0.20
30~ ± 0.25
ANGLES ±1°

Material: 材质	SEE_NOTE
Finish: 电镀	SEE_NOTE
SHEET 1 OF 2 第 1 页 共 2 页	

Designed: 设计	陈智艳
Checked: 审核	
Approved: 核准	

NAME: 名称	RJ45 1X1 5622-S 10P W/O SHIELD PCB JACK
DWG NO: 图号	E56C08012605
PART NO: 料号	SEE_NOTE

REV. 版本	23
------------	----

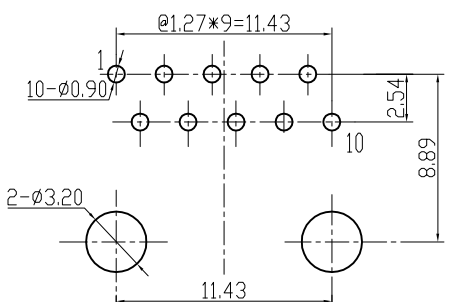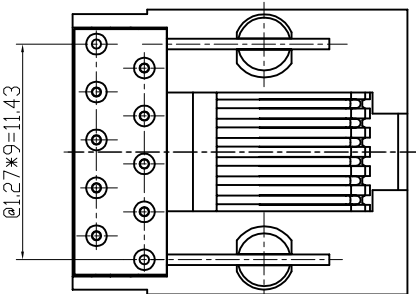

环境特性：

- 1. 储存温度：-40℃~+85℃相对湿度<80%.
- 2. 工作温度：-40℃~+85℃
- 3. 储存时间：12个月

ENVIRONMENTAL:

- 1. STORAGE TEMPERATURE : -40℃~+85℃ RELATIVE HUMIDITY<80%
- 2. OPERATION TEMPERATURE : -40℃~+85℃
- 3. GUARANTEE PERIOD : 12 MONTHS

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

	NWE P/N	P/N	DESCRIPTION		MATERIAL COLOR 材质	LOGO 商标	A尺寸
△		B562N-1430-M001	RJ45	1X1 5622-S 10P4C (4567) W/O SHIELD /5622插座 10P4C 30U (4567位)	PBT BLACK黑	W/O无	3.3±0.2
△	10220618A017	B562N-18GP-M002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PBT BLACK黑	W/O无	3.3±0.2
△	10220618D006	B562N-1815-M002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 15U*	PBT BLACK黑	W/O无	3.3±0.2
△	10220618C014	B562N-1806-M002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6U*	PBT BLACK黑	W/O无	3.3±0.2
△	10220618A005	B562N-18GP-M007	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PBT YELLOW 114C黄	W/O无	3.3±0.2
△	10220618C013	B562N-1806-U001	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6U 刻UL	PA66 BLACK黑	刻 UL	3.3±0.2
△	10220618A022	B562N-18GP-M008	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F 刻UL	PBT BLACK黑	刻 UL	3.3±0.2
△	10220618B013	B562N-1803-M009	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 3U	PBT GRAY灰	W/O无	3.3±0.2
△	10220618P004	B562N-1830-M002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 30U	PBT BLACK黑	W/O无	3.3±0.2
△	10220618P005	B562N-1830-M003	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 30U	PBT YELLOW 114C黄	W/O无	3.3±0.2
△	10220618A012	B562N-18GP-U001	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PA66 BLACK黑	W/O无	3.3±0.2
△		B562N-18GP-M009	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PBT BLUE蓝	W/O无	3.3±0.2
△	10220618B008	B562N-1803-M010	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 3U*	PBT WHITE白	W/O无	3.3±0.2
△	10220618A011	B562N-18GP-U005	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 3U*	PA66 WHITE 无玻纤白	W/O无	3.3±0.2
△		B562N-18GP-M013	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PBT RED 485C 红485C	W/O无	3.3±0.2
△		B562N-18GP-U007	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PA66 WHITE 无玻纤本色白	W/O无	3.3±0.2
△	10220618P003	B562N-1830-U001	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 30u*	PA66 BLACK黑	W/O无	3.3±0.2
△	10220618G001	B562N-1850-M002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 50u*	PBT BLACK黑	W/O无	3.3±0.2
△	10220618A016	B562N-18GP-M005	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PBT WHITE白	W/O无	3.3±0.2
△	10220618A015	B562N-18GP-U002	RJ45	1X1 5622-S 10P8C (23456789) W/O SHIELD /5622插座 10P8C 6/F	PA66 BLUE 蓝285C	W/O无	3.3±0.2
△		B562N-1403-M002	RJ45	1X1 5622-S 10P4C (1279) W/O SHIELD /5622插座 10P4C 3U 1279位	PBT YELLOW 114C黄	W/O无	3.3±0.2
△		B562N-18GP-M015	RJ45	1X1 5622-S 10P4C (1279) W/O SHIELD /5622插座 10P4C 3U 1279位	PBT GOLD GREY冷灰3U	W/O无	3.3±0.2

5622 10P单胞胎 不包铁插座

REV. 版本	ECN NO. 变更说明	DATE 日期
01	OLD DWG	
02	ADD P/N	2008.06.02
03	ADD P/N	2008.07.19
04	ADD P/N	2008.12.09
05-23	ADD P/N	2015.01.31

TOP TIP	P/N	DESCRIPTION	MATERIAL COLOR材质	LOGO商标	A尺寸	
△2	B562N-1106-M002	RJ45 1X1 5622-S 10P10C W/O SHIELD /5622插座 10P10C 6U	PBT BLACK 黑	W/0无	3.3±0.2	
	10220618B011	B562N-1803-M005	RJ45 1X1 5622-S 10P8C(23456789) W/O SHIELD /5622插座 10P8C 3U	PBT YELLOW 黄114C	W/0无	3.3±0.2
	10220611A002	B562N-11GF-M004	RJ45 1X1 5622-S 10P10C W/O SHIELD /5622插座 10P10C G/F	PBT GRAY 灰	W/0无	3.3±0.2
△3	10220611A001	B562N-11GF-M002	RJ45 1X1 5622-S 10P10C W/O SHIELD /5622插座 10P10C G/F	PBT BLACK 黑	W/0无	3.3±0.2
	10220614A002	B562N-14GF-U005	RJ45 1X1 5622-S 10P4C W/O SHIELD /5622插座 10P4C(2.3.4.7) G/F	PA66 BLACK 黑	W/0无	3.3±0.2
	10220614A002	B562N-14GF-M007	RJ45 1X1 5622-S 10P4C W/O SHIELD /5622插座 10P4C(2.3.4.7) G/F	PBT BLACK 黑	W/0无	3.3±0.2
		B562N-14GF-R001	RJ45 1X1 5622-S 10P4C W/O SHIELD /5622插座 10P4C(2.3.4.7) G/F	PA46 BLACK 黑	W/0无	3.3±0.2
	10220618B009	B562N-1803-M002	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C(2.3.4.5.6.7.8) 3U	PBT BLACK 黑	W/0无	3.3±0.2
△4	10220618A033	B562N-18GF-M019	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C(2.3.4.5.6.7.8) G/F	PBT YELLOW 黄114C	W/CZT	3.3±0.2 14240623
△5	10220614A003	B562N-14GF-M008	RJ45 1X1 5622-S 10P4C W/O SHIELD /5622插座 10P4C G/F(2.3.4.7位)	PBT YELLOW 黄114C	W/CZT	3.3±0.2 14240659
	10220618F011	B562N-1830-U003	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C 30u"	PA66 BLUE 蓝285C	W/0无	3.3±0.2
△6		B562N-14GF-U007	RJ45 1X1 5622-S 10P4C W/O SHIELD /5622插座 10P4C G/F(2.3.4.7位)	PA66 YELLOW 黄114C	W/0无	3.3±0.2
△7	10220618A043		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C G/F	PBT RED 红200C	W/0无	3.3±0.2
	10220611A005		RJ45 1X1 5622-S 10P10C W/O SHIELD /5622插座 10P10C G/F	PBT WHITE 白	W/0无	3.3±0.2
△8	10220618B019	B562N-1803-U007	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C 3U 带CZT	PA66 BLACK 黑	CZT	3.3±0.2
	10220618A019	B562N-18GF-M017	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座10P8C G/F剥头2.6	PBT BLACK 黑	W/0无	2.6±0.2
△9	10220618C028		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C 6u" 剥头2.6	PBT BLACK 黑	W/0无	2.6±0.2
△10	10220618A010	B562N-18GF-R001	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座10P8C G/F	PA46 BLACK 黑	W/0无	3.3±0.2
△11	10220618C015	B562N-1806-M001	RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座10P8C G/F	PBT YELLOW 黄114C	W/0无	3.3±0.2
△12	10220618A061		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座10P8C G/F	PBT BLUE 蓝285C	W/0无	3.3±0.2
△13	10220618B028		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C 3u"	尼龙46黑/插芯PBT黑(环保料)	W/0无	3.3±0.2
△14	10220618B030		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C 3u" 剥头2.6	PBT BLACK 黑	W/0无	2.6±0.2
	10220618A063		RJ45 1X1 5622-S 10P8C W/O SHIELD /5622插座 10P8C G/F	PA66 YELLOW 黄114C	W/0无	3.3±0.2

RoHS Compliant

5622 10P单胞胎 不包铁插座



温州意华接插件股份有限公司

WENZHOUE YI HUA CONNECTOR CO., LTD



第一视角

A4

SIZE

SCALE

比例

1:1

UNIT

单位

mm

CUSTOMER:

客户

MODEL NO:

料号

TOLERANCES公差

00~15 ± 0.15

15~30 ± 0.20

30~ ± 0.25

ANGLES ±1°

Material:材质

SEE_NOTE

Finish:电镀

SEE_NOTE

SHEET 2 OF 2

第2页 共2页

Designed:设计

陈智艳

Checked:审核

Approved:核准

NAME:名称

RJ45 1X1 5622-S 10P W/O SHIELD PCB JACK

DWG NO:图号

E56C08012605

PART NO:料号

SEE_NOTE

REV.版本

23