

包壳新结构图面

REV. 版本	ECN NO. 变更说明	DATE 日期
25	新增新结构料号	2014.12.04
26	新增料号	2015.01.31

电气特性:

1. 额定电压: 150 VAC RMS
2. 额定电流: 1.5 AMPS@25° C
3. 接触电阻: 20mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: CONTACT TO CONTACT :1000V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
0.5mA 50Hz 或 60Hz 一分钟.

环境特性:


1. 储存温度: -40°C~+85°C相对湿度<80%.
2. 工作温度: -40°C~+85°C
3. 储存时间: 12个月

机构特性:

1. 塑壳材质: PBT/PA66;
2. 圆针材质: 磷青铜, Ø0.46mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 屏蔽壳材质: 黄铜 T=0.2 镀镍
5. 插入/拔出力: 30N Max.
6. 配合强度: 50N for 60s±5s.
7. 使用寿命: 最少750次插拔.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C~+85°C
 3. GUARANTEE PERIOD : 12MONTHS
- MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096
- ROHS PART NUMBER:

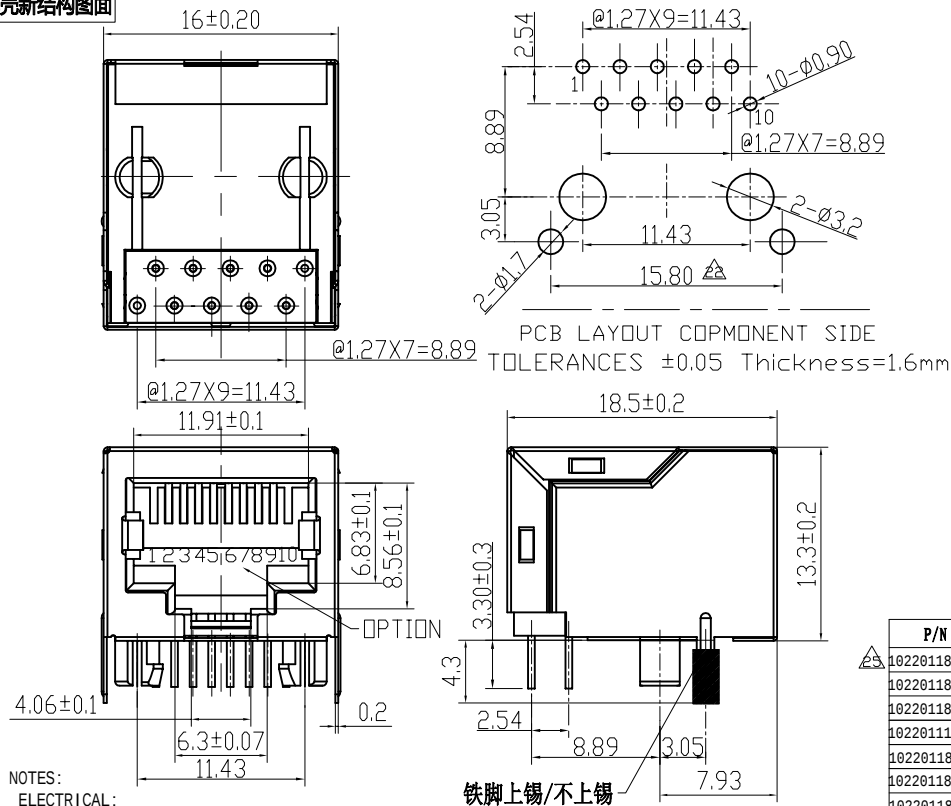

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 150 VAC RMS.
2. CURRENT RATING : 1.5 AMPS@25° C
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
5. WITHSTAND VOLTAGE : CONTACT TO CONTACT :1000V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL :1500V DC OR AC PEAK
0.5mA 50Hz or 60Hz 1 min.

MECHANICAL:

1. HOUSING&INSERT MATERIAL : PBT/PA66.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
4. SHIELD : BRASS T=0.2mm PLATED NICKEL.
5. MATING/UNMATING FORCE: : 30N Max..
6. RETENTION STRENGTH : 50N for 60s±5s.
7. DURABILITY : 750 CYCLES MIN.

RoHS Compliant

5621S插座 10P 插座

CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差	Material: 材质	SEE_NOTE	Designed: 设计	陈智艳	NAME: 名称	RJ45 5621 10P JACK	
				00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25	Finish: 电镀	SEE_NOTE	Checked: 审核		DWG NO: 图号	E56QWY-1222-13	REV. 版本
				ANGLES ±1°	SHEET 3 OF 3 第 3 页 共 3 页		Approved: 核准		PART NO: 料号	SEE_NOTE	26