

A

B

C

D

A

B

C

D





REV. 版本	ECN NO. 变更说明	DATE 日期
01-09	ADD PART NO.	2013.05.17

电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20 mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度: 1000 VAC RMS 60Hz, 1分钟

机构特性:

1. 塑壳材质 : (见料号表格) UL94V-0;
 2. 扁针材质 : 磷青铜, 厚度0.35mm;
 3. 扁针电镀 : 接触区选择镀金 G/F-50U, 镍底, 剥头电镀雾锡;
 4. 插入/拔出力 : 30N Max.
 5. 配合强度 : 50N 60S±5S.
 6. 可靠性: 最少750次插拔.
- 环境特性:
1. 储存温度: -40℃~+85℃ 相对湿度<80%
 2. 工作温度: -40℃~+85℃

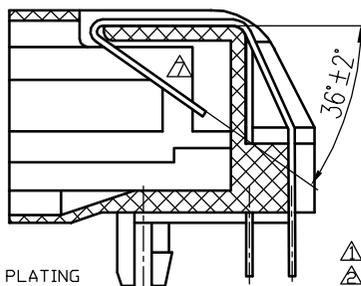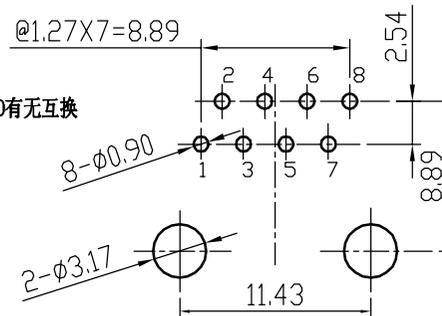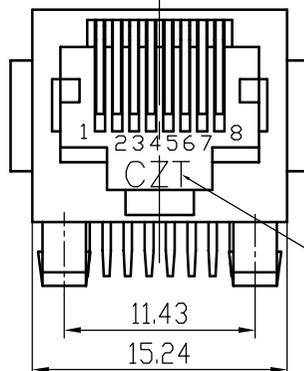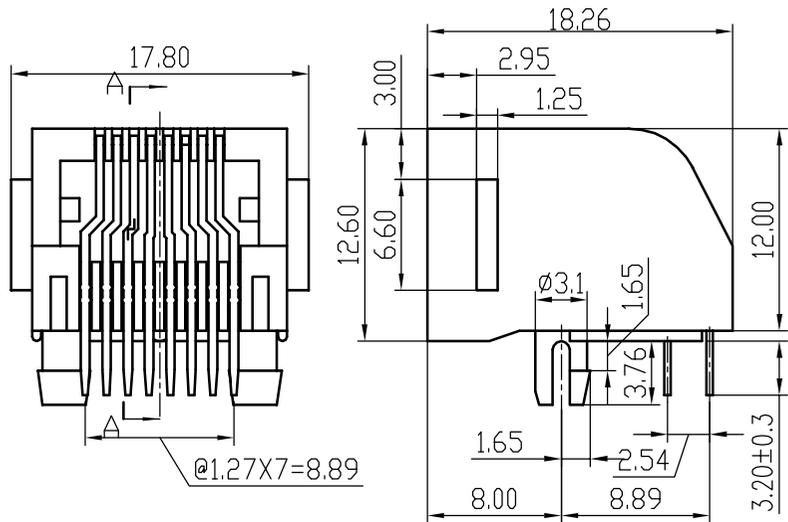

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 20 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT OR PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : CONTACT AREA- SELECTIVE GOLD PLATING G/F-50U TAILS PLATING TIN OVER NICKEL.
4. MATING/UNMATING FORCE: 30N Max.
5. RETENTION STRENGTH : 50N FOR 60S±5S.
6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C RELATIVE HUMIDITY<80%
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ROHS PART NUMBER:

NEW PART NUMBER	ROHS PART NUMBER	DESCRIPTION	CONTACT PLATING GOLD	LOGO	MATERIAL
10225188C003	B572N-8806-M005	RJ45 1X1 5722 8P8C PCB JACK	6u"	N/A	PBT BLACK 黑
N/A	B572N-88GF-R002	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PA46 BLACK 黑
10225188D004	B572N-8815-M005	RJ45 1X1 5722 8P8C PCB JACK	15u"	N/A	PBT BLACK 黑
10225188A010	B572N-88GF-M008	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PBT BLACK 黑
N/A	B572N-8450-M006	RJ45 1X1 5722 8P4C PCB JACK	50u"	N/A	PBT BLACK 黑
10225188B007	B572N-8803-M008	RJ45 1X1 5722 8P8C PCB JACK	3u"	N/A	PBT BLACK 黑
10225188G004	B572N-8850-M005	RJ45 1X1 5722 8P8C PCB JACK	50u"	N/A	PBT BLACK 黑
N/A	B572N-88GF-M013	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PBT RED 红P485
10225188A007	B572N-88GF-M014	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PBT WHITE 白D9033
10225188A004	B572N-88GF-M016	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PBT WHITE 白色白
N/A	B572N-88GF-M020	RJ45 1X1 5722 8P8C PCB JACK	G/F	N/A	PBT WHITE 白色白
10225188F008	B572N-8830-U003	RJ45 1X1 5722 8P8C PCB JACK	30u"	CZT	PBT BLACK 黑
10225188G003	B572N-8850-R001	RJ45 1X1 5722 8P8C PCB JACK	50u"	N/A	PA46 BLACK 黑

5722 8P 有耳插座

RoHS Compliant

CZT 温州意华接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

第一视角	A4 SIZE	SCALE 比例	UNIT 单位	CUSTOMER: 客户	N/A
		1:1	mm	MODEL NO: 料号	N/A

TOLERANCES 公差	Material: 材质
.0 ± 0.25	SEE NOTE
.00 ± 0.20	Finish: 电镀
.000 ± 0.10	SEE NOTE
ANGLES ± 0.5	SHEET 1 OF 1 第 1 页 共 1 页

Designed: 设计	杨光权
Checked: 审核	
Approved: 核准	

NAME: 名称	RJ45 1X1 5722 8P WITH EAR JACK
DWG NO: 图号	E5700003
PART NO: 料号	SEE NOTE

REV. 版本	09
---------	----