
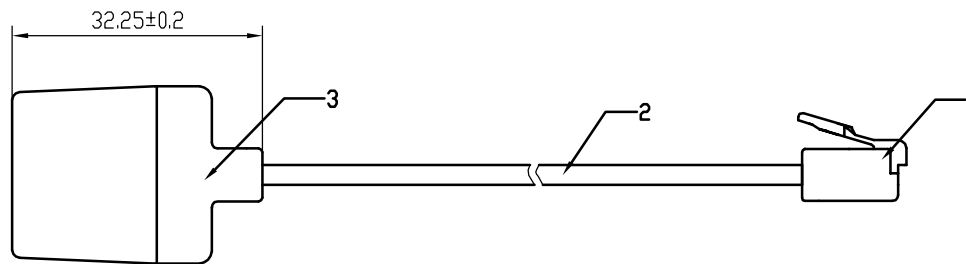
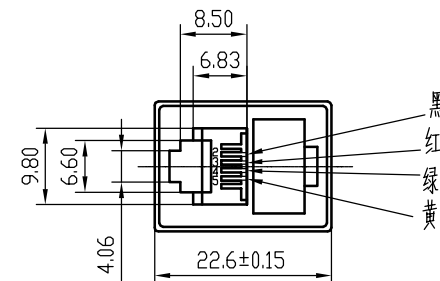


REV. 版本	ECN NO. 变更说明	DATE 日期
01	新版发行	12.07.05
02	EC12082400	2012.8.24
03	EC12090700	2012.9.7

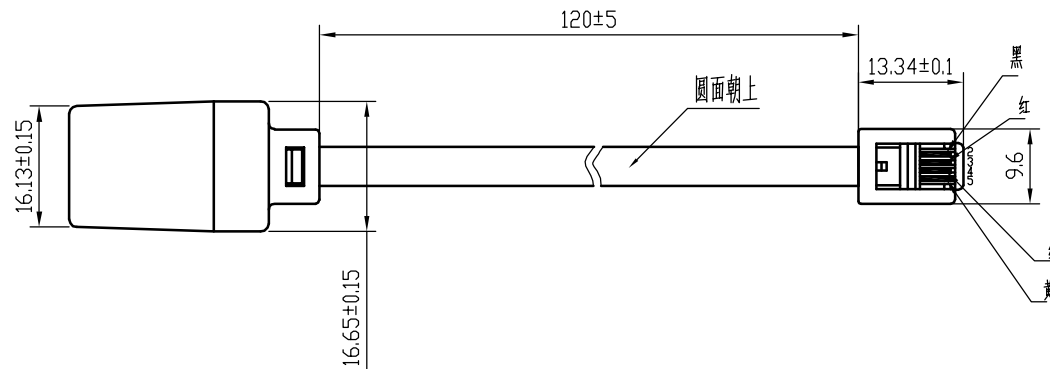

技术要求:

1. 额定电压: 125 VAC RMS;
2. 额定电流: 1.5 AMP;
3. 接触电阻: 最大20毫欧;
4. 绝缘电阻: 最小1000兆欧@500VDC;
5. 耐压强度: 1000VAC RMS 50或60Hz 1分钟;
6. 信赖性: 大于750次。

6P插座

1
2
3
4
5
6

6P水晶头

1
2
3
4
5
6

接线图

3		4005插座6P4C	普通ABS象牙757(环保料)
2		电话线4C	
1		6P4C空白方孔水晶头	普通PC透明
NO.	DWG NO.	NAME	DESCRIPTION

RoHS Compliant

CZT® 温州意华接插件股份有限公司 WENZHOU YIHUA CONNECTOR. CO. LTD				TOLERANCES 公差 00~15 ±0.15 15~30 ±0.20 30~ ±0.25 ANGLES: ±1°		Material: 材 质 普通ABS象牙 757(环保料)		Designed: 设 计 杨光权		NAME: 名 称 4005插座(带水晶头) 6P4C	
第一视角 A4 SIZE		SCALE 比 例 1:1	UNIT 单 位 mm	CUSTOMER: 客 户 MODEL NO: 料 号	SHEET 1 OF 1 第 页 共 页		Checked: 审 核 核准	DWG NO: 图 号 ECP120601	PART NO: 料 号 10250564A003	REV. 版本 04	