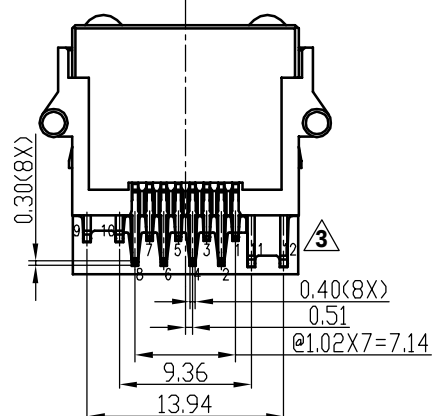



A

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 20 mΩ MAX.
4. 绝缘电阻: 1000 MΩ MIN. @500 VDC
5. 耐压强度:
CONTACT TO CONTACT: 1000 V DC OR AC PEAK;
CONTACT TO SCREEN AND TEST PANEL: 1500 V DC OR AC PEAK
@ 0.5mA 50 Hz 或 60 Hz 一分钟

1. 塑壳材质: LCP+30%GF黑色;
2. 扁针材质: 磷青铜, 厚度0.3mm;
3. 扁针电镀: 接触区镀金3U, 镍底50U, 剥头电镀雾锡120U;
4. 可靠性: 最少2000次插拔;
5. 插入/拔出力: 30N Max;
6. 配合强度: 30N Min.

1. 儲存溫度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 相對濕度 $< 80\%$

2. 工作溫度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

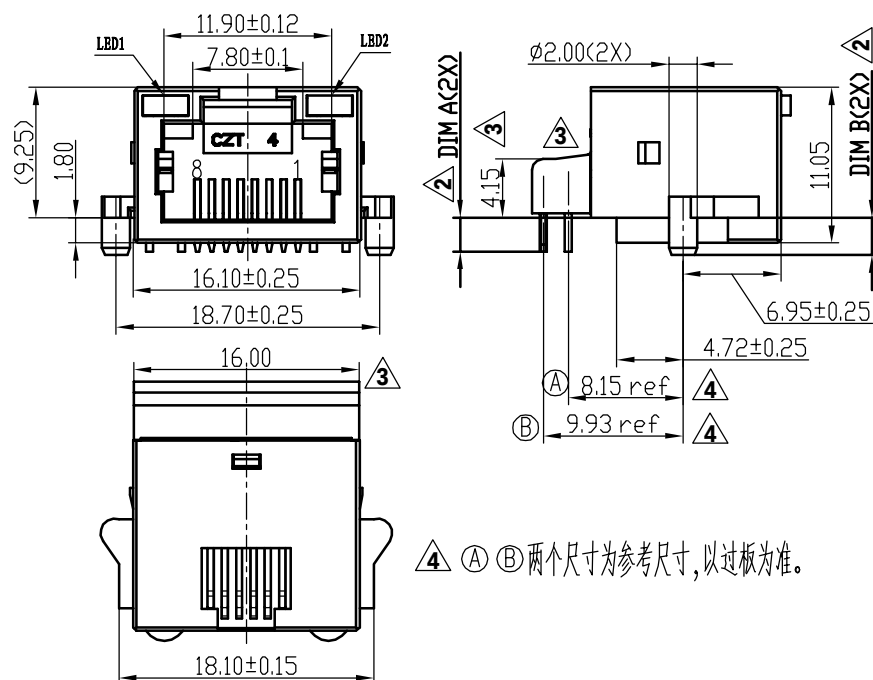

△4 ○A ○B 两个尺寸为参考尺寸,以过板为准。

- : 125 VAC RMS.
- : 1.5 AMP.
- : 20 MILLIOHMS MAX.
- : 1000 MEGOHMS MIN @ 500 VDC
- : CONTACT TO CONTACT: 1000 V DC OR AC PEAK
- : CONTACT TO SCREEN AND TEST PANEL: 1500 V DC OR AC PEAK
- : @ 0.5mA 50 Hz OR 60 Hz A MINUTE

: LCP+30%GF COLOR BLACK.
: PHOSPHOR BRONZE T=0.3mm.
1: CONTACT AREA— GOLD 3U PLATING.
2: TAILS PLATING MATTE TIN 120U MIN OVER NICKEL 50U MIN.
: 2000 CYCLES MIN.
: 30N Max.
: 30N MIN.

1. STORAGE : -40°C TO +85°C RELATIVE HUMIDITY<80%.
2. OPERATION : -40°C TO +85°C.
MATES WITH MODULAR PLUG CONFORMING TO
EC-60603 & TIA-1096.

C

B

C

D

CZT[®] 温州壹华接插件股份有限公司
WENZHOUI YIHUA CONNECTOR CO., LTD

公差	公差
0 ~ 15	±0.15
15 ~ 30	±0.20
30 ~	±0.25

RJ45 1x1 8P8C SIDE ENTRY PCB JACK W/O SHIELD

A4	SIZE
----	------


E	UNIT 單位
	mm

N/A
N/A

SHEET 1 OF 2
第 1 页 共 2 页

PART NO:
料 号

REV.	版本
04	

AB

C

2

2

2



D

TOLERANCES
公差

Material:	$\frac{1}{2}$ $\frac{1}{2}$
-----------	--

SEE NOTE

Designed:	设计
-----------	----

刘攀

NAME:
姓名

D

A4
SIZE

SCALE
比例
1:1

UNIT 單位	
mm	

CUSTOMER:
客户

MODEL NO:
料号

N/A
N/A

ANGLES: $\pm 1^\circ$

SHEET 2 OF 2
第 2 页 共 2 页

Checked:
 审 核

Approved:
核 准

DWG NO:	图号
---------	----

PART NO	料 号
---------	-----

ESP121102

SEE TABLE

REV.	版本
------	----

	04
--	----