
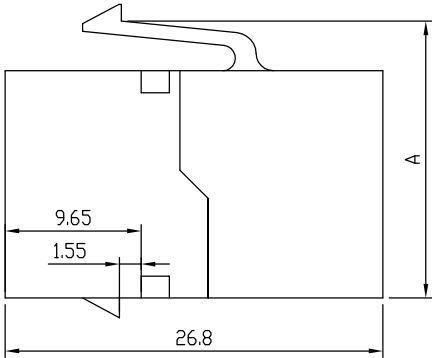
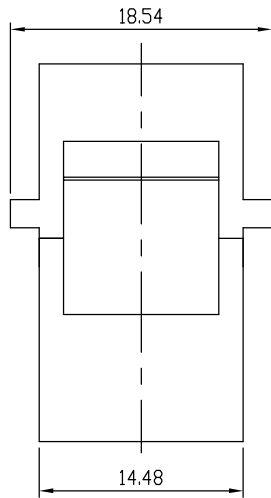


A

B

C

D

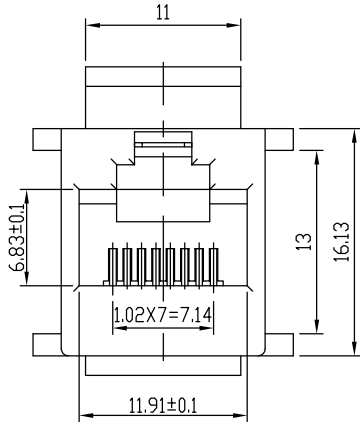

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - MATERIAL:
 - HOUSING: PA66+30%GF, UL94V-0;
 - TERMINALS: T0.35*0.46 PHOSPHOR BRONZE,
 - MECHANICAL
 - MATING/UNMATING FORCE: 30N Max.
 - RETENTION STRENGTH: 50N for 60S±5S
 - DURABILITY: SEE TABLE.
 - ENVIRONMENTAL:
 - STORAGE: : -40℃~85℃ RELATIVE HUMIDITY<80% .
 - OPERATION: -40℃~85℃.
 - GUARANTEE PERIOD: 12 MONTHS.

1

尺寸: A	胶体材质
20.06±0.15	ABS
19.66±0.15	PBT
19.66±0.15	PA66无玻纤

- 备注:
- 电气特性
 - 额定电压: 125 VAC RMS
 - 额定电流: 1.5 AMP
 - 接触电阻: 小于20毫欧
 - 绝缘电阻: 大于1000兆欧@500 VDC
 - 耐压强度: 1000 VAC RMS(50或60Hz, 1分钟) 无击穿或飞弧现象.
 - 机构特性
 - 胶壳: ABS/PBT/PA66,
 - 金针: T0.35*0.46磷青铜
 - 机械特性
 - 插入/拔出力: 30N Max.
 - 配合强度: 50N 60S±5S.
 - 信赖性: 750 Min.
 - 环境特性:
 - 储存温度: 0℃~70℃(ABS) -40℃~85℃ 相对湿度<80%.
 - 工作温度: 0℃~70℃(ABS) -40℃~85℃
 - 储存时间: 12个月.

RoHS Compliant

CZT® 温州竟华接插件股份有限公司 WENZHOU YIHUA CONNECTOR CO., LTD				TOLERANCES 公差	Material: 材质	见表格	Designed: 设计	刘 攀	NAME: 名称	模块双联8P8C	
				00~15 ±0.15 15~30 ±0.20 30~ ±0.25	Finish: 电镀	见表格	Checked: 审核		DWG NO: 图号	QWY-1088-4	REV. 版本
				ANGLES: ±1°	SHEET 1 OF 2 第1页 共2页		Approved: 核准		PART NO: 料号	见表格	02

A

B

C

D

