
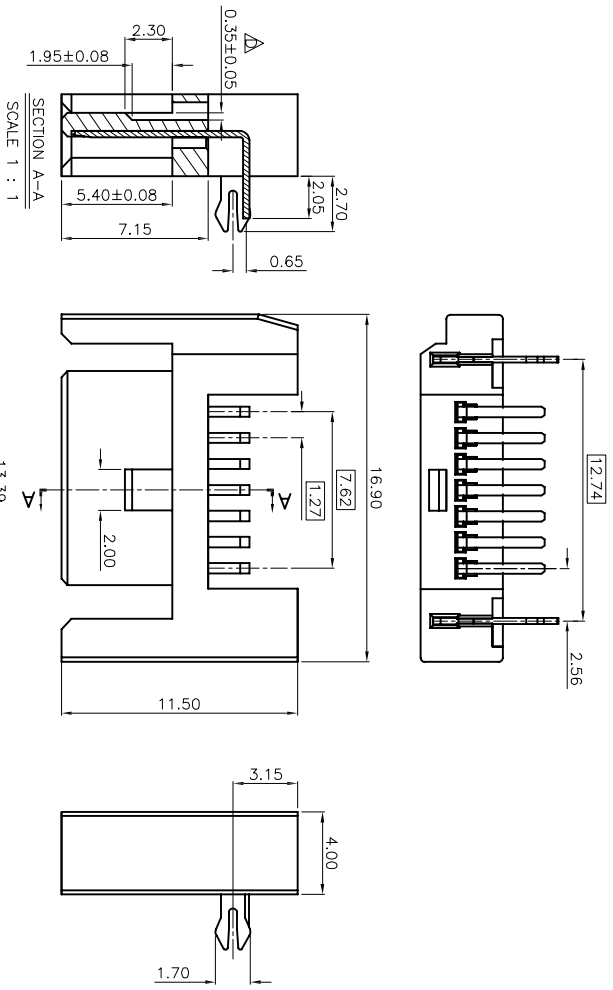


NOTES:
1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0,
COLOR: SEE TABLE
CONTACT: COPPER ALLOY T=0.30±0.01mm
LATCH: COPPER ALLOY T=0.30±0.01mm
2. PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL
UNDERPLATE: SOLDER TAIL 150u" MIN MISTY TIN OVER
50u" MIN NICKEL UNDERPLATE OVER ALL GOLD SPECIFICATION:
a. G/F; b. 15u"
LATCH: 100u" MIN MISTY TIN PLATING ON SOLDER TAILS
50u" MIN NICKEL UNDERPLATING
3. ELECTRICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500
OPERATING TEMPERATURE: -20°C ~ +85°C

RECOMMEND PCB LAYOUT

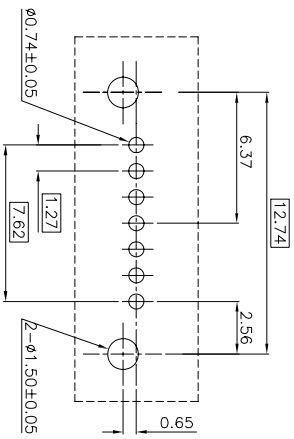

ROHS COMPLIANT

CZT 东莞市意兆电子科技有限公司
DONGGUAN YIZHAO ELECTRONIC CO., LTD

TOLERANCES
公差

Material: 材质
Finish: 电镀
SHEET 1 OF 1
第 1 页 共 1 页

Designed: 设计
Checked: 审核
Approved: 核准

NAME: 名称
SATA 7PIN 公座 DIP 型带鱼叉脚

SCALE: 比例
UNIT: 单位
CUSTOMER: 客户
MODEL NO: 料号
X±0.30
XX±0.20
XXX±0.15
Y° ±2°
.Y° ±
XXX±0.10 .YY° ±

第三视角
A4
1:1
mm
REV. 版本
00