


SPECIFICATION: [(1P*30#+D+AL+M)*5C]+[(4C*30#+D+AL)] /NONUL				CONSTRUCTION D.W.G			
ITEM		SPECIFICATION					
CONDUCTOR	AWG	30AWG	30AWG				
	MATERIAL	COPPER-CLAD STEEL	COPPER-CLAD STEEL				
	COND.SIZE	1/0.254±0.01mm	1/0.254±0.01mm				
INSULATOIN	MIN.AVG.THICK	0.18mm	0.10mm				
	MATERIAL	HD-PE	PP				
	O . D	0.75±0.05mm	0.55±0.05mm				
DRAIN	AWG	30AWG	30AWG				
	MATERIAL	COPPER-CLAD STEEL	COPPER-CLAD STEEL				
	SIZE	1/0.254±0.01mm	1/0.254±0.01mm				
Face Inside AL.MYLAR	COVERAGE	100% 125%	100% 125%	COLOUR CODE:			
	OVERLAP	25% MIN	25% MIN	(1P*30#+DAM)*5C : 1. WHITE*BLACK 2. WHITE*BROWN 3. WHITE* RED 4. WHITE* GREEN 5.WHITE*BLUE			
MYLAR	MATERIAL	100% 125%	/	4C*30AWG: 1.RED 2.PURPLE 3.GRAY 4.WHITE			
	SIZE	25% MIN	/				
Face Outside AL.MYLAR	AWG	/	/	MARKING			
	MATERIAL	/	/	High Speed HDMI™ Cable with Ethernet HIGH SPEED HDMI™ CABLE			
	SIZE	/	/	REMARK			
BRAID COPPER	COVERAGE	/	/	RoHs&SS00259			
	OVERLAP	/	/				
	N O.	(1P*30#+DAM)*5C	4C*30#+DA				
JACKET	MIN.AVG.THICK	0.51MM		 COPARTNER WIRE & CABLE (KUNSHAN) MFG. CO., LTD.			
	MATERIAL	HALF MATT PVC					
	COLOUR	WHITE					
	OD	(2.80±0.10)*(11.50±0.30)mm					
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES OF JACKET		PART NO. 91499****			
1. Rating : TEMP 80℃ ; VOLTAGE 30V 2.Character Impedance: 100Ω±15%				APPROVED	周清	CUSTOMER	意華
				CHECKED		REV	2
				DRAWING	Sun Xiang	DATE	2013-9-27

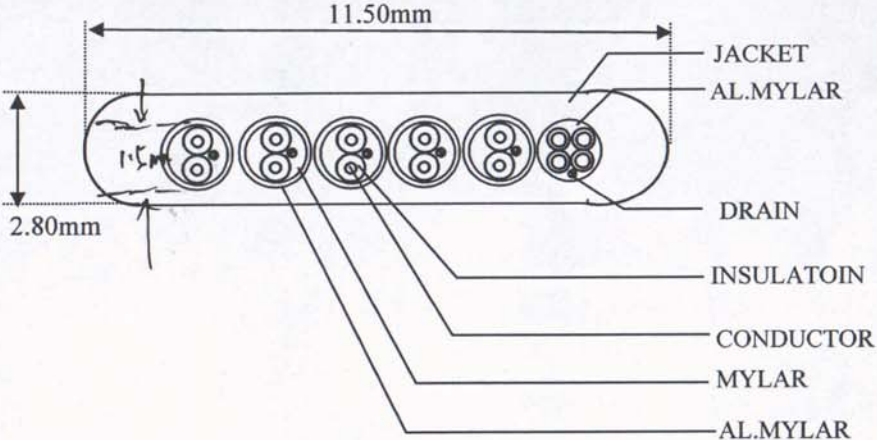